

PWC SERIES

FREE FLOW, VALVELESS

PRESSURE WASHER COUPLINGS

INTRODUCTION

Holmbury PWC Series, Free Flow, Valveless Couplings do not have shut-off valves in either the male or female halves. Consequently, the couplings can handle high flow rates and create a negligible pressure drop. However, when disconnected, any residual fluid in the line will be free to escape. For this reason, the couplings should only be used for the transmission of non-hazardous substances such as water.

APPLICATIONS

High pressure water jetting and steam applications, mainly in the cleaning industry.

MATERIALS

Zinc plated carbon steel body with dual Viton seals for extra safety. These couplings are also available in Stainless Steel (PWS Series).

TECHNICAL DETAILS

Maximum working pressure coupled	350 bar
Rated flow	45 l/min
Working temperature range with Viton seals	-15°C to +180°C


ORDER CODES

PWC	06	- F -	06	G			
PWC Series							
Coupling Size							Any other information
M = Male coupling							Blank = Viton Seals
F = Female coupling							
Thread size (dash system)							Blank = Female thread (no code required)
06 = 3/8"							M = Male thread
Thread Form							
G = BSP P							


Example: PWC06-F-06G
PWC Series carbon steel, pressure washer, female coupling, body size 06, with 3/8" BSP female thread



PRESSURE DROP CHARACTERISTICS

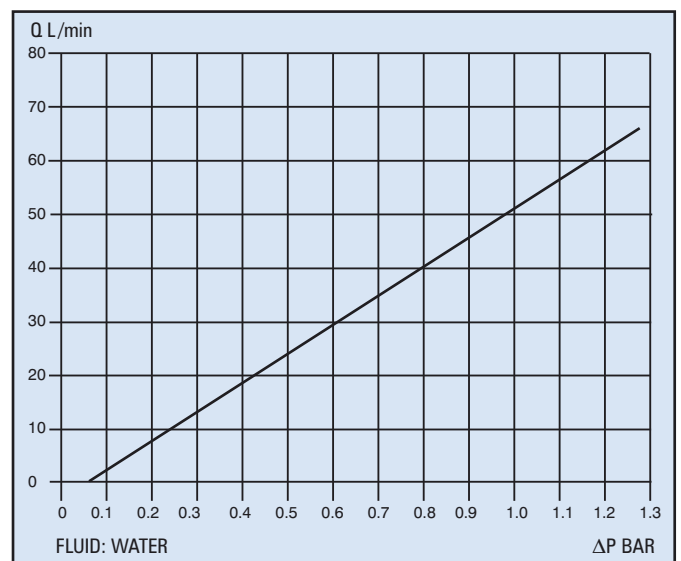

PWC SERIES, FREE FLOW, VALVELESS, CARBON STEEL PRESSURE WASHER COUPLINGS

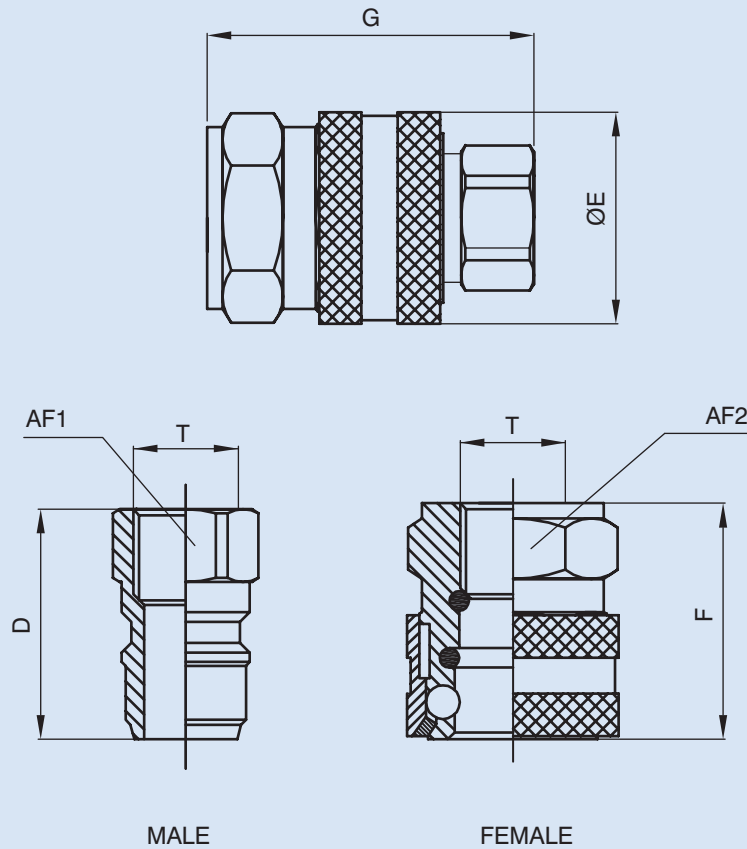

DIMENSIONS (mm except where stated)

Coupling	Thread	D	ØE	F	G	AF1	AF2
PWC 06 06 G	3/8" BSP	38	35	39	54	22	30